


# SUBMITTAL SHEET

## LMV & DLMV-Series Flanged Resilient Wedge Mainline Gate Valves For IPS, DIPS & DIN Metric Plastic Pipe

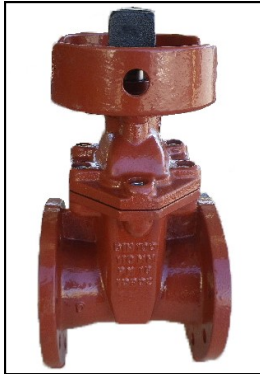

LMV-FF (IPS & DIPS) SERIES (FLANGE X FLANGE)			
MODEL	FLANGE	FLANGE	SHROUD
LMV-11FF	2"	2"	4" IPS
LMV-22FF	2.5"	2.5"	4" IPS
LMV-33FF	3"	3"	6" IPS
LMV-44FF	4"	4"	6" IPS
LMV-66FF	6"	6"	6" IPS
LMV-88FF	8"	8"	6" IPS
LMV-1010FF	10"	10"	6" IPS
LMV-1212FF	12"	12"	6" IPS
LMV-1414FF	14"	14"	6" IPS
LMV-1616FF	16"	16"	6" IPS

DLMV-FF (DIN) SERIES (FLANGE X FLANGE)			
MODEL	FLANGE	FLANGE	SHROUD
DLMV-99FF	90MM	90MM	6" IPS
DLMV-1111FF	110MM	110MM	6" IPS
DLMV-1616FF	160MM	160MM	6" IPS
DLMV-2020FF	200MM	200MM	6" IPS
DLMV-2525FF	250MM	250MM	6" IPS
DLMV-3232FF	315MM	315MM	6" IPS
DLMV-4040FF	400MM	400MM	6" IPS
DLMV-4545FF	450MM	450MM	6" IPS

### Features and Benefits:

#### 250 PSI Ductile Iron Body Gate Valves

- Bolted Bonnet
- Non-Rising Stem
- Resilient Wedge
- Flanges Conform with ANSI B16.1 Class 125 (IPS & DIPS)
- Conforms to AWWA C509 Standards
- 5-Year Standard Warranty (Parts and Labor Replacement Fees)
- Optional 10-Year Warranty Available (ask for details)

**MATERIAL:** .....  
**PRESSURE RATING:** .....  
**EPOXY COATING:** .....  
**FLANGED ENDS:** .....  
**GASKETS/O-RINGS:** .....  
**INSTALLATION:** .....

**Class 350 Ductile Iron per ASTM A-536, Grade 65-45-12, AWWA C-515  
 250 PSI  
 ANSI/AWWA C116/A21.16-09, NSF 61 & CSA Z245.20-98, 12-14 MIL  
 Conform with ANSI B16.1 Class 125 (IPS & DIPS)  
 High grade EPDM rubber ANSI/AWWA C111/A21.11  
 Per IPS, DIPS & DIN Pipe Standards**

### Specification:

All mainline valves shall be resilient wedge and conform to AWWA C509 standards. Material shall be ductile iron per ASTM A-536, Grade 65-45-12. Epoxy coating on all interior and exterior surfaces shall be fusion bonded epoxy, 12-14 mil thickness. The epoxy coating shall pass 90-Day immersion tests per CSA Z245.20-98. Flanged valve ends shall be class 125 for IPS & DIPS sizes. Valves shall have a shroud around the 2" operating nut to accept IPS PVC sleeve which provides dirt-free access to actuate the valve. All mainline valves shall be as manufactured by Leemco, Inc., U.S.A.



Leemco, Inc.  
 360 S. Mount Vernon  
 Colton, CA. 92324  
 Ph: (909) 422-0088 Fx: (909) 422-0086  
 Web: www.leemco.com

**Leemco has a large variety of Valve Accessories...  
 Please refer to our IPS and DIN Price Lists for available Models and Sizes.**